HOIST UK
SAFETY ABOVE ALL

GREEN PIN® STANDARD DEE SHACKLE WITH SAFETY NUT & BOLT PIN – GPSAD

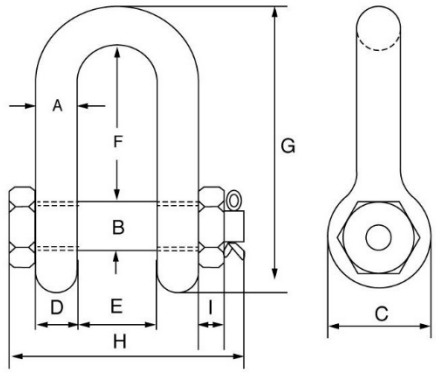

STANDARD FEATURES

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised.
- Conforms to BS EN 13889 (from 0.5t to 25t) and meets the performance requirements of US Fed. Spec. RR-C-271 type IVA class 2, grade A.
- From 2t and upward these shackles comply with ASME B30.26.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -40°C up to +200°C
- Full CAD support available upon request.
- Certification available 2.1 3.1 DoC DNV GL 037

DIMENSIONS

G-4153

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSAD2	2	13.5	16	34	13	22	43	81	82	13	0.39
GPSAD3.25	3.25	16	19	40	16	27	51	97	98	17	0.67
GPSAD4.75	4.75	19	22	46	19	31	59	112	114	20	1.08
GPSAD6.5	6.5	22	25	52	22	36	73	134	130	23	1.66

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSAD8.5	8.5	25	28	59	25	43	85	154	150	25	2.46
GPSAD9.5	9.5	28	32	66	28	47	90	167	166	28	3.4
GPSAD12	12	32	35	72	32	51	94	180	178	31	4.51
GPSAD13.5	13.5	35	38	80	35	57	115	209	197	34	6.1
GPSAD17	17	38	42	88	38	60	127	230	202	19	7.63
GPSAD25	25	45	50	103	45	74	149	271	249	24	13.25
GPSAD35	35	50	57	111	50	83	171	305	269	27	18.53
GPSAD42.5	42.5	57	65	130	57	95	190	345	301	30	25.94
GPSAD55	55	65	70	145	65	105	203	376	330	33	35.33
GPSAD85	85	75	83	162	73	127	229	427	380	40	52.97