HOIST UK
SAFETY ABOVE ALL

GREEN PIN® STANDARD DEE SHACKLE WITH SCREW COLLAR PIN – GPSCD

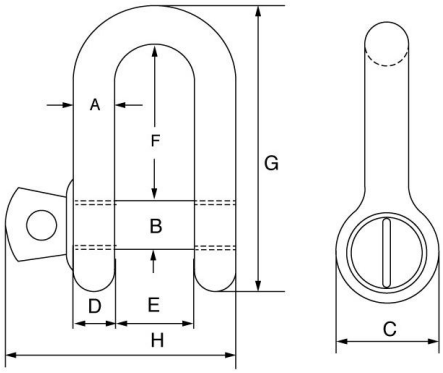

STANDARD FEATURES

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised.
- Conforms to BS EN 13889 (from 0.5t to 25t) and meets the performance requirements of US Fed. Spec. RR-C-271 type IVA class 2, grade A.
- From 2t and upward these shackles comply with ASME B30.26.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -40°C up to +200°C
- Full CAD support available upon request.
- Certification available 2.1 3.1 DoC DNV GL 037

DIMENSIONS

G4151

Product Code	W.L.L.	A	B	C	D	E	F	G	H	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSCD1	1	10	11	22.5	10	17	32	59	54	0.14
GPSCD1.5	1.5	11	13	26.5	11	19	37	68	59.5	0.19
GPSCD2	2	13.5	16	34	13.5	22	43	81	73	0.32
GPSCD3.25	3.25	16	19	40	16	27	51	97	89	0.54
GPSCD4.75	4.75	19	22	47	19	31	59	112	103	0.87

Product Code	W.L.L.	A	B	C	D	E	F	G	H	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSCD6.5	6.5	22	25	53	22	36	73	134	119	1.34
GPSCD8.5	8.5	25	28	60	25	43	85	154	137	2.08
GPSCD9.5	9.5	28	32	67	28	47	90	167	153	2.77
GPSCD12	12	32	35	74	32	51	94	180	170	3.72
GPSCD13.5	13.5	35	38	80	35	57	115	209	186	5.14
GPSCD17	17	38	42	89	38	60	127	230	203	6.85
GPSCD25	25	45	50	104	45	74	149	271	243	11.45
GPSCD35	35	50	57	111	50	83	171	305	272	16.86
GPSCD42.5	42.5	57	65	134	57	95	190	345	310	24.61
GPSCD55	55	65	70	145	65	105	203	376	344	32.65